


30FL1

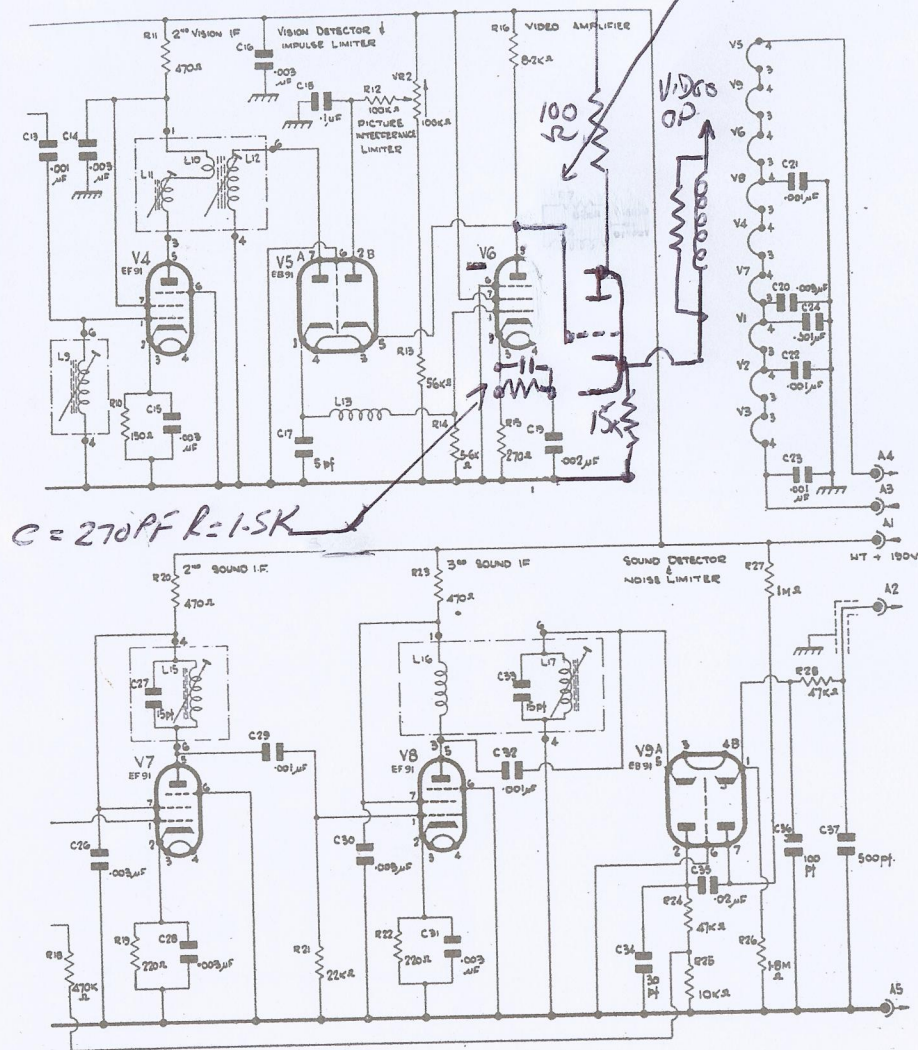

ORIGINAL RECEIVER UNIT OF BUSH MODELS TV22, TV24, TUG24

## MODIFICATIONS

In later models an image filter consisting of a parallel tuned circuit in series with the aerial lead has been fitted. The tuning range is 80-100 Mc/s., and should be tuned to give minimum output of the unwanted signal. The filter core must be adjusted from the underside of the receiver chassis.

## Receiver Unit (All models).


R2 and R9 have been changed to 120 ohms.

R7 and R11 have been changed to 680 ohms.

C2 has been changed to 300 pF.

Connections to L1/2: Delete No. 4 and substitute No. 1.

R14	5.6k	R23	470
R15	270	R24	47k
R16	8.2k	R25	10k
R17	8.2k	R26	1.8M
R18	470k	R27	1M
R19	220	R28	47k
R20	470	VR1	7k
R21	22k	VR2	100k
R22	220		

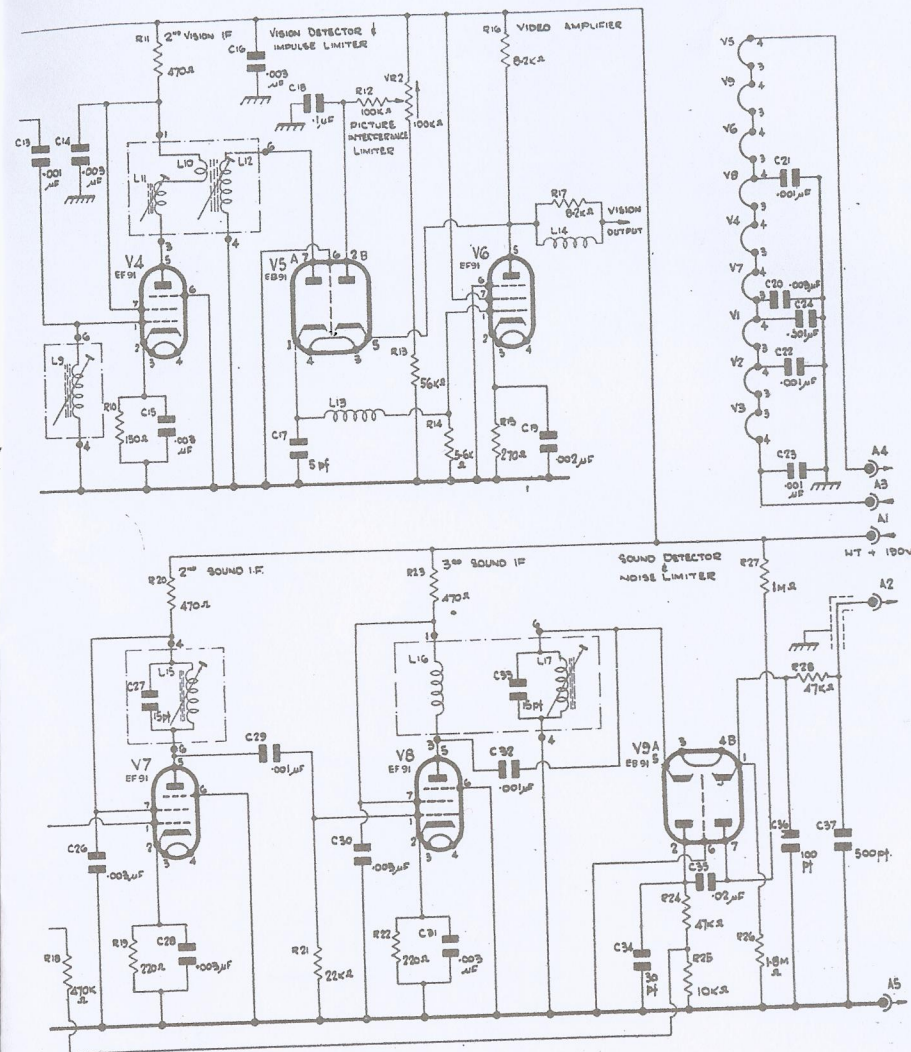

ORIGINAL RECEIVER UNIT OF BUSH MODELS TV22, TV24, TUG24

## MODIFICATIONS

In later models an image filter consisting of a parallel tuned circuit in series with the aerial lead has been fitted. The tuning range is 80-100 Mc/s., and should be tuned to give minimum output of the unwanted signal. The filter core must be adjusted from the underside of the receiver chassis.

## Receiver Unit (All models).

R2 and R9 have been changed to 120 ohms.

R7 and R11 have been changed to 680 ohms.

C2 has been changed to 300 pF.

Connections to L1/2: Delete No. 4 and substitute No. 1.

R14	5.6k	R23	470
R15	270	R24	47k
R16	8.2k	R25	10k
R17	8.2k	R26	1.8M
R18	470k	R27	1M
R19	220	R28	47k
R20	470	VR1	7k
R21	22k	VR2	100k
R22	220		